



Plastic Safety  
Systems, Inc.


# SafetyWall™

ADA-Compliant  
Pedestrian Barricade

## Ideal for Accessible Work Zones.

### **Hand-Trailing**

Smooth, continuous,  
rounded top is safer  
for the hand.

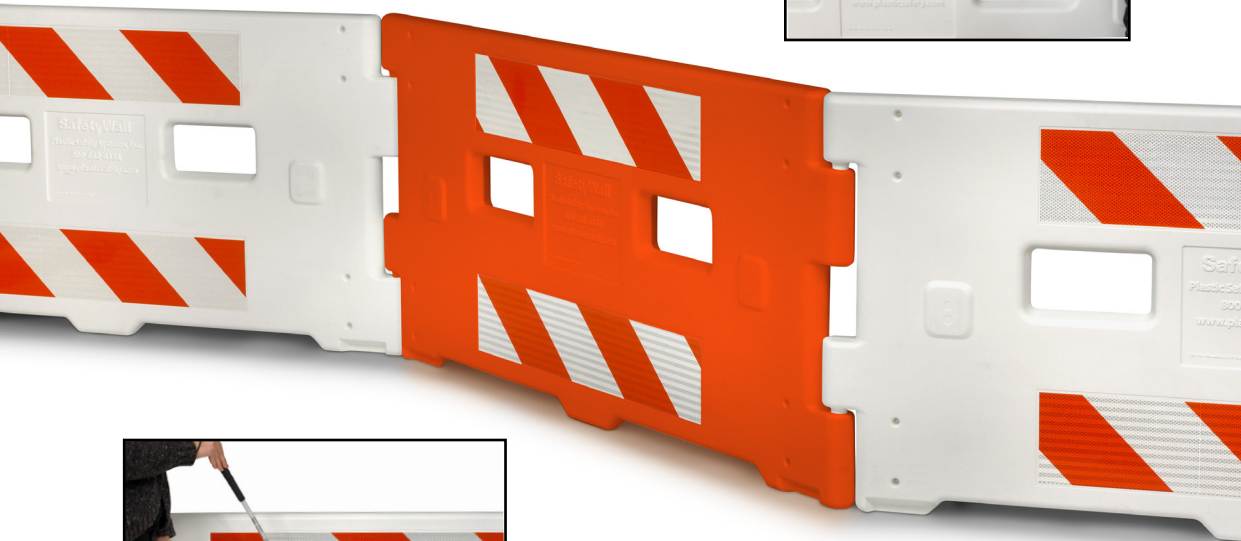

### **Cane-Ready**

Ground hugging bottom  
practically eliminates the  
risk of trapped cane tips.

**Meets or Exceeds ADA Guidelines and  
MUTCD 2009 Edition Standards.**

ADA-Compliant Pedestrian Barricade  
**SafetyWall™**

Plastic Safety Systems, Inc.

2444 Baldwin Road  
Cleveland, OH 44104

p: 216-231-8590

p: 800-662-6338

f: 216-231-2702

[www.plasticsafety.com](http://www.plasticsafety.com)




### SafetyWall™:

- Provides the same level of pedestrian guidance as concrete or plastic barrier, but is easier to transport, install and remove.
- Helps support pedestrians in the event of a fall.
- Complies with ADA Guidelines and MUTCD 2009 Edition, either as a single barricade or as a longitudinal channelizing device.
- Interlocks to provide continuous, safe, obstacle-free guidance through pedestrian work zones.



*SafetyWall, an interlocking device, assembles quickly and easily...no tools or hardware required!*

**Meets MUTCD 6F.71, Longitudinal Channelizing Devices, Standard for pedestrian traffic control.**

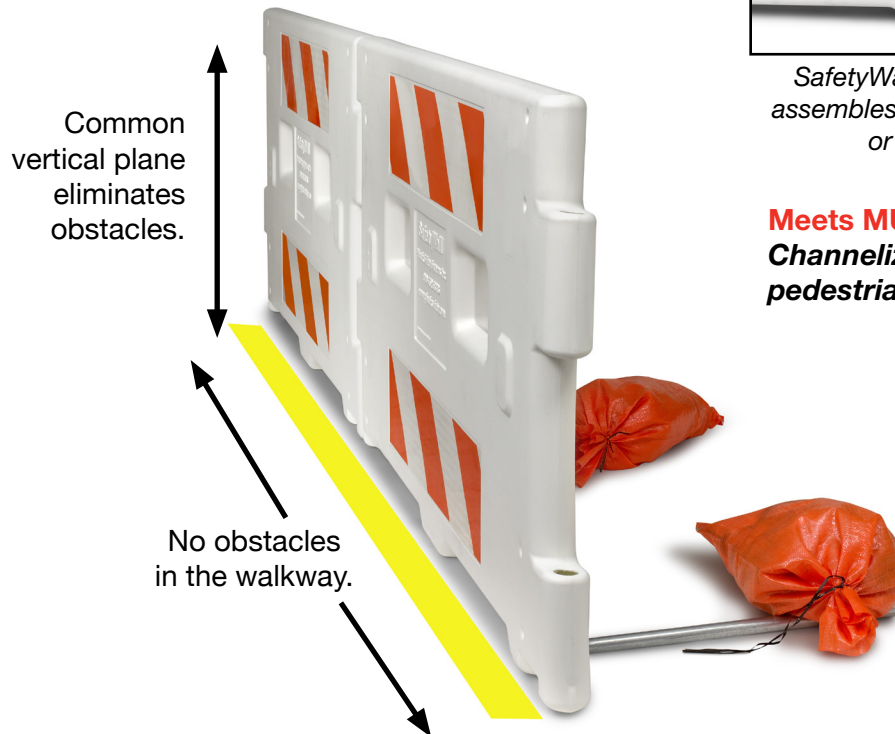

**SafetyWall is ADA-Compliant.**

### SafetyWall™ Features:

- SafetyWall measures 74" long, 36" tall, 3" thick, and weighs only 35 lbs. It's a lightweight device designed for easy transport and installation.
- 1 person can install an entire sidewalk or pedestrian detour of SafetyWall in minutes. Unlike concrete barrier, no equipment is required to move SafetyWall in place.
- With its simple yet robust interlocking connection, no tools are required for assembly.
- Folding metal legs provide support; sand bags add ballast. Simply snap the legs back into place, out of the way, when not in use.
- SafetyWall stacks neatly for easy transport and storage.
- Made from UV-stabilized high-density plastic, for long life and durability.

**"On the Roadway for Safety"®**